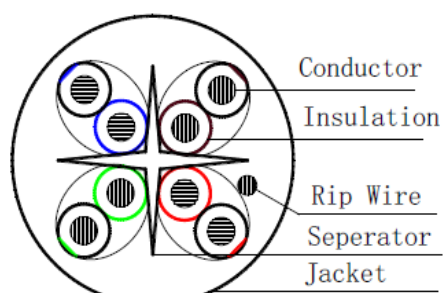


## Wire Drawing

Specifications	UTP CAT 6 23AWG*4P 1/0.57CCA*4P+(PE CROSS)						
Item	Unit	Specification value					
Name	Unit	Specification value	Unit Weight (kg/km)	Specification value	Unit Weight (kg/km)		
Inner Cores	Core number or	C/P	8 C/4P				
	condu	Specificati	mm <sup>2</sup>	0,57			
		Structure	mm	1 / 0,570 CCA			
		Stranded	mm		OD	0,57	
	Insul	Material		HDPE			
		Average Thickness	mm	0,23			
		OD:	mm	1,02 ± 0,02			
Spark Voltage		KV	6Kv				
Color			See the material List(cores twisted)				
Assemble	Set Spacing	mm	100 ±10		Stranded Outer Diameter	3,8	
	Filler	mm	PE"+				
	E. D(drain wire)	mm			Stranded		
	Light Myra Stranded Outer	mm			Orientation		
Braiding	Ribbon	mm			Orientation		
	Brading Structure	mm			Pitch(1Inch=Visual Number)		
	Coverage				Overall Diameter		
Jacket	Material		PVC Jacket				
	Average Thickness	mm	0,60				
	Color		Grey/Semi Mist Surface				
	OD	mm	6,0 ± 0.1 0.2		Jacket Shape	Circular	
	External Extrusion Mode		Tube Extrusion			Spark Voltage	1,5 KV
	Printing Wheel Number	Inkjet Printing	Printing Color	BLACK	Metering	By Order	
	Printing Content	U/UTP CAT6 AWG23/1 CCA SOLID PVC GREY xxxM					
Unit Weight (KG/KM)		0,00					
Material Coding	1. HDPE 8380/3364 10Orange, 2White / Orange Twisted Pair 3Green, 4White / Green Twisted Pair 5Blue, 6White / Blue Twisted Pair 7Brown, 8White / Brown Twisted Pair						
Drawing Number	12-08A08010						
Edition		A / 0		Revision Date		2018/6/7	